



GTW3

Motore per ascensore

Voltaggio : 380 V



Sospensione : 2:1

Freno (PZD140) : DC110V 2*0.89 A

Peso : 530 kg

Portata Max statica : 4000 kg

GTW GTS

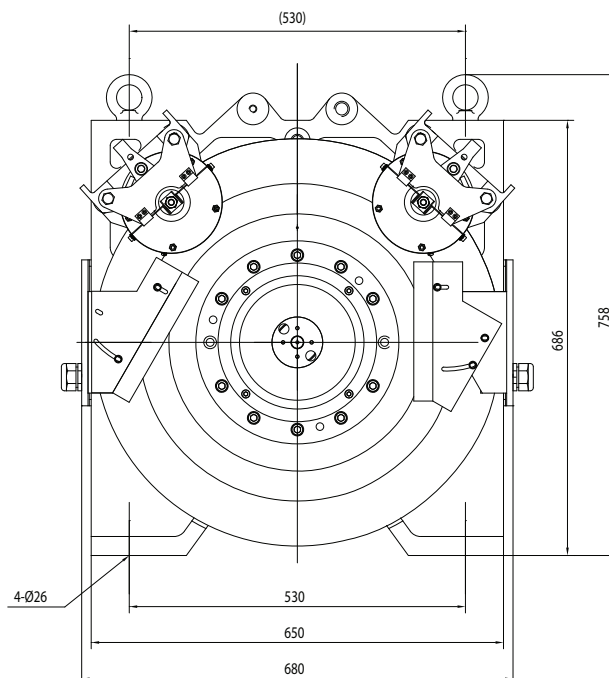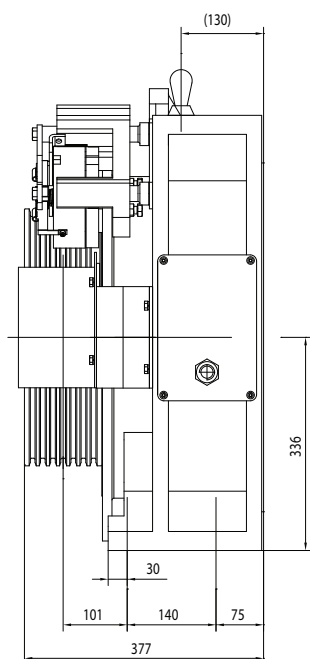

Riferimento	Ca- rico (kg)	Velo- cità (m/s)	Al- tezza (mt)	Puleg- gia Ø (mm)	Funi (mm)	Cor- rente (A)	Coppia (Nm)	Giri motore (rpm)	Frequenza (Hz)	Potenza (kW)	Poli	Valuta- zione	Classe isola- mento	IP
GTW3-111P0	1150	1,0	≤ 80	Ø 400	7XØ10X16	19	780	96	16	7,8	20	S5(40%)	F	IP41
GTW3-111P5	1150	1,5	≤ 80	Ø 400	7XØ10X16	27,8	780	144	24	11,8	20	S5(40%)	F	IP41
GTW3-111P6	1150	1,6	≤ 80	Ø 400	7XØ10X16	27,8	780	153	25,5	12,5	20	S5(40%)	F	IP41
GTW3-111P7	1150	1,75	≤ 80	Ø 400	7XØ10X16	30,5	780	167	27,8	13,6	20	S5(40%)	F	IP41
GTW3-121P0	1250	1,0	≤ 80	Ø 400	7XØ10X16	20	870	96	16	8,7	20	S5(40%)	F	IP41
GTW3-121P5	1250	1,5	≤ 80	Ø 400	7XØ10X16	31,1	870	144	24	13,1	20	S5(40%)	F	IP41
GTW3-121P6	1250	1,6	≤ 80	Ø 400	7XØ10X16	31,1	870	153	25,5	13,9	20	S5(40%)	F	IP41
GTW3-121P7	1250	1,75	≤ 80	Ø 400	7XØ10X16	33,5	870	167	27,8	15,2	20	S5(40%)	F	IP41
GTW3-131P0	1350	1,0	≤ 80	Ø 400	7XØ10X16	21,8	945	96	16	9,5	20	S5(40%)	F	IP41
GTW3-131P5	1350	1,5	≤ 80	Ø 400	7XØ10X16	33,2	945	144	24	14,2	20	S5(40%)	F	IP41
GTW3-131P6	1350	1,6	≤ 80	Ø 400	7XØ10X16	33,2	945	153	25,5	15,1	20	S5(40%)	F	IP41
GTW3-131P7	1350	1,75	≤ 80	Ø 400	7XØ10X16	37,6	945	167	27,8	16,5	20	S5(40%)	F	IP41

Nota:

Questa macchina può essere configurata con il rilascio a distanza manuale del freno che è 4m.