



YJ245D

Motore per ascensore


Sospensione : 1:1

Controllo : AC2, VVVF

Freno (DZE-12E) : DC110V 2A

Peso (con supporto) : 900 kg

Portata Max statica : 11000 kg

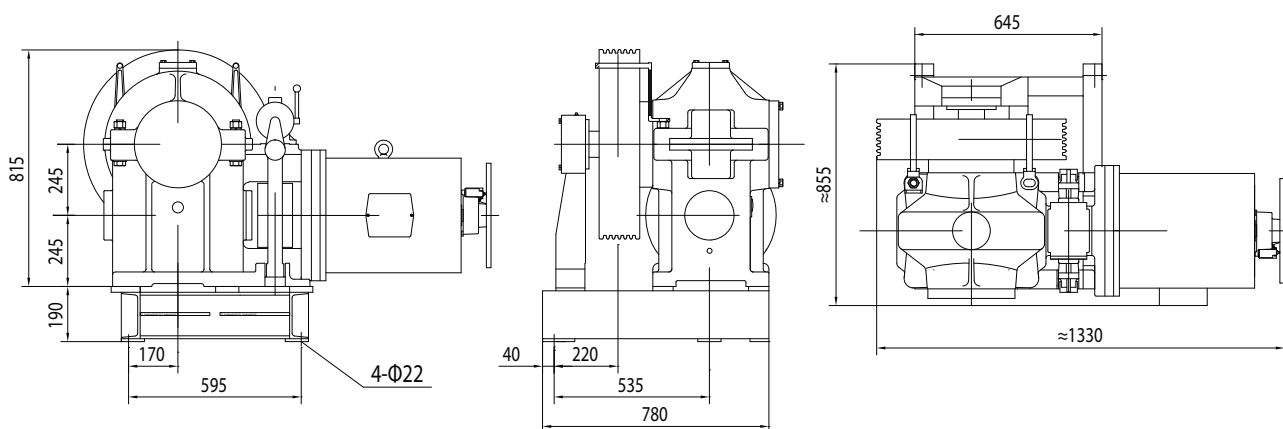

Carico (kg)	Velocità (m/s)	Rapporto	Puleggia ø (mm)	Funi (mm)	Potenza (kW)	Poli
1250	0,5	61:1	Ø 650	6XØ13X20	7,5	6
1250	1,0	61:2	Ø 650	6XØ13X20	15	6
1250	1,6	61:2	Ø 650	8XØ13X20	22	4
1250	1,75	55:2	Ø 650	8XØ13X20	22	4
1250	2,0	49:2	Ø 650	8XØ13X20	26	4
1350	0,5	61:1	Ø 650	6XØ13X20	11	6
1350	1,0	61:2	Ø 650	6XØ13X20	15	6
1350	1,6	61:2	Ø 650	8XØ13X20	22	4
1350	1,75	55:2	Ø 650	8XØ13X20	22	4
1350	2,0	49:2	Ø 650	8XØ13X20	26	4
1600	0,5	61:1	Ø 650	8XØ13X20	11	6
1600	1,0	61:2	Ø 650	8XØ13X20	18,5	6
1600	1,6	61:2	Ø 650	8XØ13X20	26	4
1600	1,75	55:2	Ø 650	8XØ13X20	26	4
1600	2,0	49:2	Ø 650	8XØ13X20	30	4
1250	0,5	61:1	Ø 610	6XØ13X20	7,5/1,5	6/24
1250	1,0	61:2	Ø 610	6XØ13X20	15/3,5	6/24
1350	0,5	61:1	Ø 610	6XØ13X20	11/2,3	6/24
1350	1,0	61:2	Ø 610	6XØ13X20	15/3,5	6/24
1500	0,5	61:1	Ø 610	8XØ13X20	11/2,3	6/24
1500	1,00	61:2	Ø 610	8XØ13X20	18,5/4,3	6/24

Nota:

La puleggia a sinistra è opzionale.

5/6 x diametro 16 x 25 funi opzionali.