

PMG240

Motore per ascensore



Voltaggio : 380V

Sospensione : 1:1


Motore Tipo : PM

Freno (PZ300B) : DC110 V 1.3A

Peso : 500 kg

Portata Max statica : 7500 kg

Possibilità montaggio orizzontale

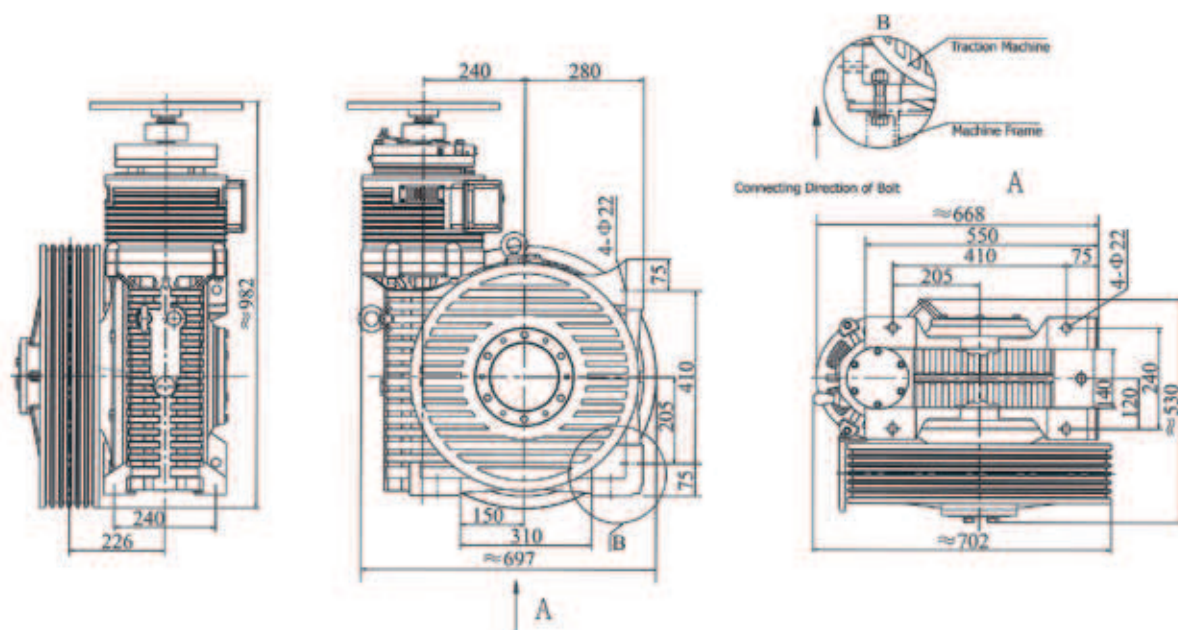

Carico (kg)	Velocità (m/s)	Altezza (mt)	Rapporto	Puleggia ø (mm)	Funi	Potenza (Kw)	Giri motore (rpm)	Frequenza (Hz)	Poli	Classe isolamento	IP
1000	1,0	≤ 80	93:2	Ø 620	6XØ13X20	8,6	1450	96,7	8	F	IP21
1000	1,6	≤ 80	55:2	Ø 620	6XØ13X20	13,2	1400	93,3	8	F	IP21
1000	1,75	≤ 80	55:2	Ø 620	6XØ13X20	14,2	1500	100	8	F	IP21
1000	2,0	≤ 80	68:3	Ø 620	6XØ13X20	15,9	1400	93,3	8	F	IP21
1150	1,0	≤ 80	93:2	Ø 620	6XØ13X20	9,7	1450	96,7	8	F	IP21
1150	1,6	≤ 80	55:2	Ø 620	6XØ13X20	14,9	1400	93,3	8	F	IP21
1150	1,75	≤ 80	55:2	Ø 620	6XØ13X20	16	1500	100	8	F	IP21
1150	2,0	≤ 80	68:3	Ø 620	6XØ13X20	18	1400	93,3	8	F	IP21